

Features & Advantages

- **Convenient** SUPA CYCLONE[™] pumps come with a tool-free strainer lid for easy removal of leaves.
- **Reliable** Constructed from strong engineered plastic to ensure corrosive and UV proof for long-lasting life.
- **Safe** Built-in thermal overload protection against damage from overheating.
- All models come with 1.5" (Imperial) /50m (Metric) traditional union.
- Self priming at 2m.
- Enclosure Class is IP55 & Insulation Class is F.

Warranty

Pump	2 years		
O-ring and Mechanical Seal	1 year		

SUPA CYCLONE pump series is a cost effective solution for water circulation. They have all the necessary performance for domestic pools and are engineered for easy installation and worry free operation.

Operating Limits

Maximum water temperature	50 ℃
Maximum Ambient Tempreture	50 ℃
Noise at 1 meter	65 dB

Application


- Domestic pools
- Spa jet operation
- Solar pool heating
- Water features








High performance induction motor



Transparent Lid with easy removable strainer

Specification

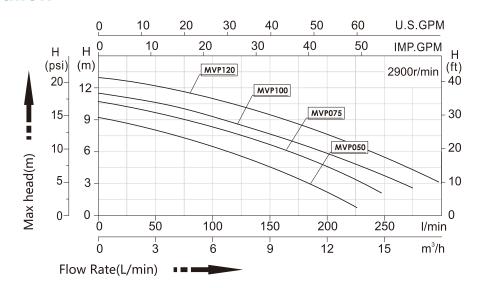

	MODEL	CODE 50HZ	CONNECTIONS	VOLTAGE	PHASE	AMP	INPUT POWER	OUTPUT POWER	RPM
۰		00112	INCH	V		Α	kw	HP	
	MVP050	90992	1.5"	220 - 240	1	1.7	0.37	0.5	2850
	MVP075	90993				2.5	0.55	0.75	
	MVP100	90994				3.4	0.75	1.0	
	MVP120	90995				4.1	0.90	1.2	

