

## Features & Advantages



- **Reliable** - Constructed from corrosion resistant engineered plastic for long working life.
- **Sea Water** - Appropriate especially for sea water application such as in Aquarium.
- **High Performance** - Maximum flow rate up to 110m<sup>3</sup>/h.
- All models come with union connection either 3" or 75mm.
- **Self** - priming at 2m.
- Enclosure Class is IP55 & Insulation Class is F.

## Warranty

Pump	2 years
O-ring and Mechanical Seal	1 year

**MINDER TORNATO™** pump, with maximum of 15hp, is designed for commercial pools and aquariums. The wet-end components are constructed from corrosion, high and low temperature resistant engineered plastic for long operation life. All models come with 3" union (Imperial or Metric).

## Operating Limits

Maximum water temperature	50 °C
Maximum Ambient Temperature	50 °C
Noise at 1 meter	65 dB

## Application

- Domestic pools
- Commercial pools
- Aquariums



Transparent Lid




Robust plastic body for high power pump



Easy union connection union 3" / 90mm 20651

## Specification

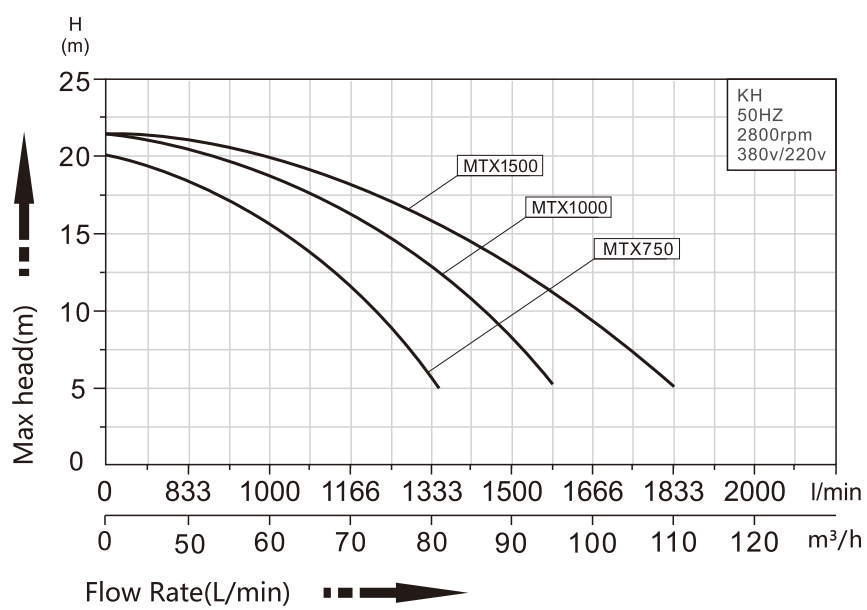

MODEL	CODE 50HZ	CONNECTIONS		VOLTAGE	PHASE	INPUT POWER	OUTPUT POWER	RPM
		IMPERIAL	METRIC	V		kw	HP	
MTX750	90722					5.5	7.5	
MTX1000	90723	3.0"	90mm	380 - 400	3	7.5	10	2850
MTX1500	90724					11	15	

## Dimensions

